

**WELLS
CARGO®**

FASTTRAC® THE ALL-PURPOSE TRAILER

VALUE-DRIVEN WITH A SPIRIT THAT'S BORN TO HAUL!

The FastTrac® brings a whole new level of value to the light-duty recreational cargo trailer market. A balanced combination of versatility and affordability, the FastTrac® delivers on all fronts. From its unpretentious styling to its uncompromising dependability, only Wells Cargo® could pack so much value into an entry-level trailer.



Trailers shown may feature optional equipment available at an additional charge.

FASTTRAC®

SPECIFICATIONS



	FT58S2	FT610S2	FT612S2	FT714T2	FT716T2
Body: Length Width	9' 5" 5' 0"	11' 7" 6' 0"	13' 7" 6' 0"	15' 7" 7' 0"	17' 7" 7' 0"
Overall: Length Width Height	11' 6" 6' 8" 7' 2"	14' 0" 7' 8" 8' 2"	16' 0" 7' 8" 8' 2"	17' 8" 8' 6" 8' 3"	19' 8" 8' 6" 8' 3"
Interior: Length Width Height	9' 1" 4' 8" 5' 6"	11' 3" 5' 8" 6' 6"	13' 3" 5' 8" 6' 6"	15' 3" 6' 8" 6' 6"	17' 3" 6' 8" 6' 6"
Platform Height	18"	18"	18"	19"	19"
Spring Suspension E-Z[®] Lube Axles: Qty Total Capacity	Single 3,500 lbs.	Single 3,500 lbs.	Single 3,500 lbs.	Tandem 7,000 lbs.	Tandem 7,000 lbs.
Brakes with Breakaway Kit	Not Available	Optional	Optional	Electric Drum	Electric Drum
Radial Tire Size Tire Load Range	ST205/75R15 C	ST205/75R15 C	ST205/75R15 C	ST205/75R15 C	ST205/75R15 C
Hitch Ball Size	2"	2"	2"	2-5/16"	2-5/16"
Hitch Height to Top of Ball	16"	16"	16"	17"	17"
Hitch Weight (% of Curb Weight)	10% to 15%	10% to 15%	10% to 15%	10% to 15%	10% to 15%
Curb Weight (Approximate)	935 lbs.	1,195 lbs.	1,325 lbs.	2,125 lbs.	2,275 lbs.
GVWR	2,990 lbs.	2,990 lbs.	2,990 lbs.	7,000 lbs.	7,000 lbs.
Payload Capacity (Approximate)	2,055 lbs.	1,795 lbs.	1,675 lbs.	4,875 lbs.	4,725 lbs.
Rear Door Opening - Width x Height	51" x 59.25"	63" x 72"	63" x 72"	63" x 72"	63" x 72"
Side Door Opening - Width x Height	N/A	32' x 72"	32' x 72"	32' x 72"	32' x 72"
12v Male Connection	4-way	4-way	4-way	7-way	7-way
Tube Main Rails	2" x 3"	2" x 3"	2" x 3"	2" x 4"	2" x 4"

STANDARD FEATURES

- Exclusive Bull Nose Profile
- 15" Radial Tires with Silver Spoke Wheels
- Smooth Jeep Fenders (*Smooth Teardrop on 7' Wide Models*)
- Ball Coupler Hitch
- Safety Chains with Clevis Hook and Latch
- White .024 Aluminum Exterior (*With Screws*)
- 1-Piece Aluminum Roof
- 12v LED Exterior Lighting & Slim Line Tail Lights
- 16" Starbright Stoneguard
- Flow-Thru Sidewall Vents
- Rear Ramp Door with Spring Assist (*Single Swing Door on 5x8 Model*)
- 32" Side Entry Door with Bar Lock (*No Side Door on 5x8 Model*)
- 12v Dome Light
- 3/4" PlexCore™ Decking
- Economy Sidewall Liner
- 500 lb. Wall Mounted Rope Rings (4)
- Spring Axles with 4" Drop
- E-Z Lube[®] Hubs
- Undercoated Chassis
- 16" OC Vertical Posts
- 24" OC Crossmembers
- 24" OC Tube Roof Bows
- 1-Year Limited Warranty

DELUXE PACKAGE UPGRADES

- .030 Aluminum Exterior
- Exterior Color Options
- 3/8" PlexCore™ Sidewall Liner
- (4) 5,000 lb. Floor D-Rings (*500 lb. Wall Rope Rings on 5'W models*)



Trailers shown may feature optional equipment available at additional cost.



www.wellscargo.com

Specifications, features, options, packages & pricing subject to change **without** notice. See your authorized Wells Cargo[®] dealer for more information.

The Wells Cargo logo is a black circle with the words "WELLS" and "CARGO" stacked vertically in white, bold, sans-serif capital letters. It is set against a yellow background that is part of a larger graphic element on the left side of the page.

**WELLS
CARGO®**

ROAD FORCE® MUSCLE TO MOVE

WHEN YOU NEED A RELIABLE, EVERYDAY WORKHORSE!

Whatever the job. Wherever you go. Whenever duty calls. A Road Force® cargo trailer has the muscle to move! Designed and built by Wells Cargo®, the company that pioneered the cargo trailer industry over 65 years ago, the feature-rich Road Force® delivers a whole new level of value. From the rugged triple 16's (OC) tubular steel frame to the LED tail lights, the Road Force® is no stranger to quality. So for the price of an "ordinary" trailer, you can step up to the quality and value of the extraordinary Road Force®.



Trailer shown features optional equipment available at an additional charge.

ROAD FORCE®


SPECIFICATIONS



	RF58S2	RF610S2	RF612S2	RF612T2	RF712T2	RF714T2	RF716T2
Body: Length Width	8' 9" 5' 0"	10' 9" 6' 0"	12' 9" 6' 0"	12' 9" 6' 0"	12' 9" 7' 0"	14' 9" 7' 0"	16' 9" 7' 0"
Overall: Length Width Height	11' 6" 6' 8" 7' 4"	14' 0" 7' 8" 8' 3"	16' 0" 7' 8" 8' 3"	16' 0" 7' 8" 8' 4"	15' 8" 8' 6" 8' 5"	17' 8" 8' 6" 8' 5"	19' 8" 8' 6" 8' 5"
Interior: Length Width Height	8' 5" 4' 8" 5' 6"	10' 5" 5' 8" 6' 6"	12' 5" 5' 8" 6' 6"	12' 5" 5' 8" 6' 6"	12' 5" 6' 8" 6' 6"	14' 5" 6' 8" 6' 6"	16' 5" 6' 8" 6' 6"
Platform Height	18"	18"	18"	19"	19"	19"	19"
Spring Suspension E-Z Lube® Axles: Qty Total Axle Capacity	Single 3,500 lbs.	Single 3,500 lbs.	Single 3,500 lbs.	Tandem 7,000 lbs.	Tandem 7,000 lbs.	Tandem 7,000 lbs.	Tandem 7,000 lbs.
Electric Brakes with Breakaway Kit	N/A	Optional	Optional	Electric Drum	Electric Drum	Electric Drum	Electric Drum
Radial Tire Size Tire Load Range	ST205/75R15 C	ST205/75R15 C	ST205/75R15 C	ST205/75R15 C	ST205/75R15 C	ST205/75R15 C	ST205/75R15 C
Hitch Ball Size	2"	2"	2"	2-5/16"	2-5/16"	2-5/16"	2-5/16"
Hitch Height to Top of Ball	16"	16"	16"	17"	17"	17"	17"
Hitch Weight (% of Curb Weight)	10% to 15%	10% to 15%	10% to 15%	10% to 15%	10% to 15%	10% to 15%	10% to 15%
Curb Weight (Approximate)	880 lbs.	1,100 lbs.	1,250 lbs.	1,650 lbs.	1,810 lbs.	1,975 lbs.	2,140 lbs.
GVWR	2,990 lbs.	2,990 lbs.	2,990 lbs.	7,000 lbs.	7,000 lbs.	7,000 lbs.	7,000 lbs.
Payload Capacity (Approximate)	2,110 lbs.	1,890 lbs.	1,740 lbs.	5,350 lbs.	5,190 lbs.	5,025 lbs.	4,860 lbs.
Rear Door Opening - Width x Height	54" x 60"	66" x 72"	66" x 72"	66" x 72"	78" x 72"	78" x 72"	78" x 72"
Pass-Thru Door Opening - Width x Height	N/A	36" x 66"	36" x 66"	36" x 66"	36" x 66"	36" x 66"	36" x 66"
12v Male Connection	4-way	4-way	4-way	7-way	7-way	7-way	7-way
Tube Main Rails	2" x 3"	2" x 3"	2" x 3"	2" x 4"	2" x 4"	2" x 4"	2" x 4"

STANDARD FEATURES

- Radius Front/Round Roof with Silver Cap
- Silver Spoke Wheels with 15" Radial Tires
- ATP Jeep Fenders (ATP Teardrop Fenders on 7' Wide Models)
- .030 Aluminum Bonded Exterior (No Screws)
- .080 Aluminum Roof Cove
- 1-Piece Aluminum Roof
- 12v LED Slim Line Tail Lights
- 12v LED Clearance Lights
- 24" ATP Stoneguard
- Flow-Thru Sidewall Vents
- Rear Ramp Door with Spring Assist (Single Swing Door on 5x8 Model)
- 16" Ramp Extension
- 36" Pass-Thru Door with Flush Lock (No Side Door on 5x8 Model)
- 12v LED Dome Light with Wall Switch
- 3/4" PlexCore™ Decking
- 3/8" PlexCore™ Sidewall Liner
- Spring Axles with E-Z Lube® Hubs
- Electric Brakes with Breakaway Kit (Tandem Axle Models Only)
- Entire Chassis Undercoated
- ArmorTech™ on A-Frame and Rear End Rail
- 16" OC Tube Vertical Posts
- 16" OC Crossmembers
- 16" OC Tube Roof Bows
- 3-Year Limited Warranty

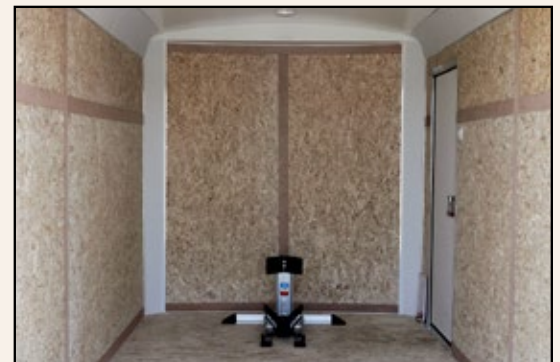

Trailers shown feature *optional* equipment available at an additional charge.



www.wellscargo.com

Specifications, features, options, packages & pricing subject to change **without** notice. See your authorized Wells Cargo® dealer for more information.